

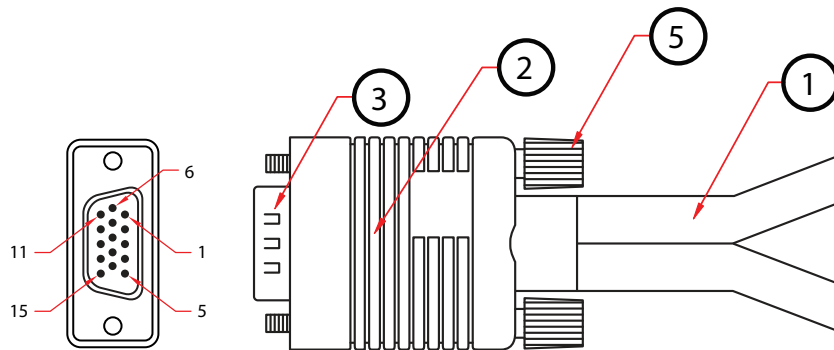


REV.	DESCRIPTION	DATE
A		
B		10-2006




HD15 / M

Pin Assignment					
HD15 Male		HD15 Female		HD15 Female	
1	————	1	————	1	
2	————	2	————	2	
3	————	3	————	3	
4	————	4	————	4	
5	————	5	————	5	
6	————	6	————	6	
7	————	7	————	7	
8	————	8	————	8	
9	————	9	————	9	
10	————	10	————	10	
11	————	11	————	11	
12	————	12	————	12	
13	————	13	————	13	
14	————	14	————	14	
15	————	15	————	15	

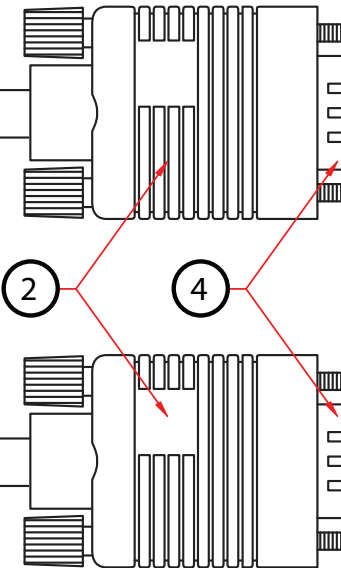

HD15 / F



HD15 / F

RoHS

5	Slotted 4/40 Molded Thumbscrew, Color: Beige
4	HD15 (VGA) Female, w/Gold Flash Contacts
3	HD15 (VGA) Male, w/Gold Flash Contacts, No Pin 9
2	Molded PVC Hood, Beige
1	15C (28AWG 7*0.12mm), Al/Mylar Foil Shielding + Drain Wire (26AWG 7*0.16mm), Beige PVC Jacket
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	10H1-27708			DRAWER	MPD
TITLE	HD15 (VGA) Male to HD15 (VGA) 2 x Female, Y Video Cable, 8 inches			CHECKED	MAC
				APPROVED	MAC
MATERIAL		SCALE			
REV.	A	UNIT	INCH		
DRAWING NO:				